

Pressure Sensitive Mounting


ECP 0622

SOFT FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.05 Thk.	22 kg/m	to 48 kg/m

Material: beryllium copper - .05 mm thick

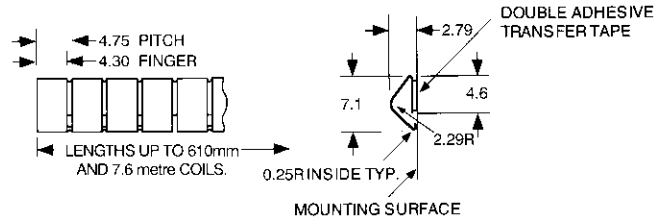


ECP 0644

SOFT FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.05 Thk.	21 kg/m	to 39 kg/m

Material: beryllium copper - .05 mm thick

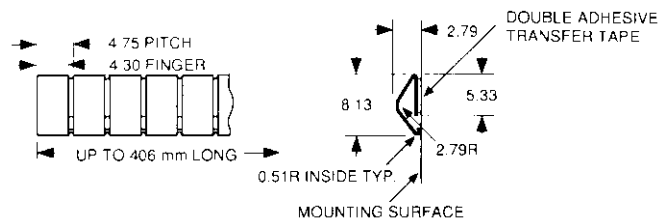


ECP 0645

SOFT FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.05 Thk.	15 kg/m	to 31 kg/m

Material: beryllium copper - .05 mm thick

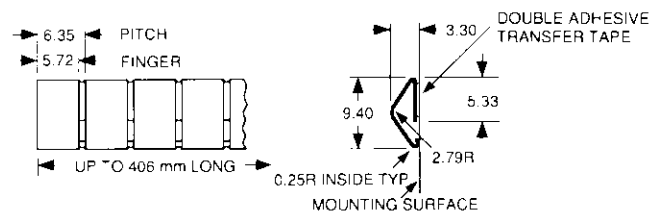


ECP 0626

SOFT FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.05 Thk.	15 kg/m	to 31 kg/m

Material: beryllium copper - .05 mm thick

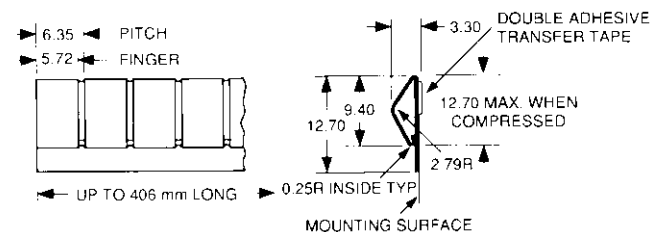


ECP 0646

SOFT FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.089 Thk.	15 kg/m	to 30 kg/m
"LC" Style 0.05 Thk.	3 kg/m	to 11 kg/m

Material: beryllium copper - .09 mm thick (LC style- .05 mm thick)

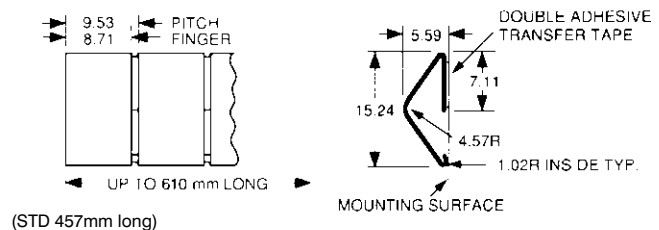


ECP 0648

SOFT FINGERS


Performance Range

	25% Compression-50% Compression	
Standard 0.10 Thk.	10 kg/m	to 25 kg/m

Material: beryllium copper - .10 mm thick

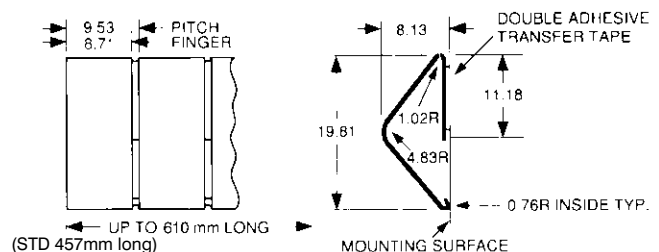

Pressure Sensitive Mounting

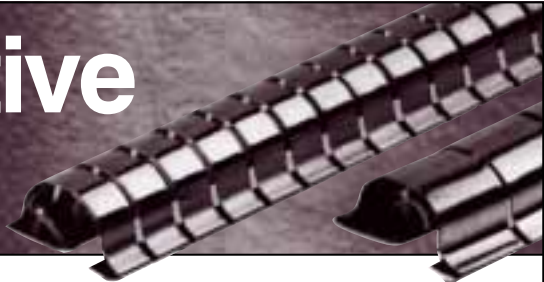


ECP 0647

SOFT FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.13 Thk.	18 kg/m	to 36 kg/m

Material: beryllium copper – .13 mm thick

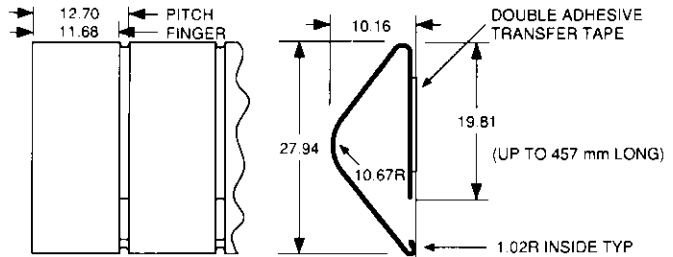


ECP 0649

SOFT FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.08 Thk.	37 kg/m	to 132 kg/m
"LC" Style 0.05 Thk.	9 kg/m	to 34 kg/m

Material: beryllium copper – .08 mm thick (LC style– .05 mm thick)

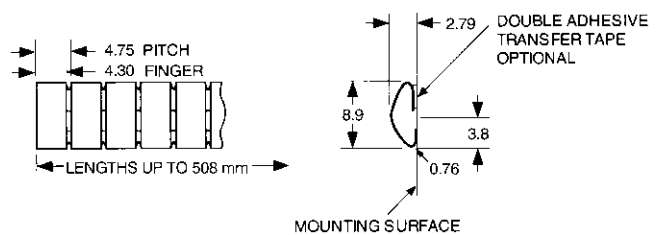


ECP 621

SOFT NO-SNAG FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.05 Thk.	*	to *

Note: Consult factory for performance data.

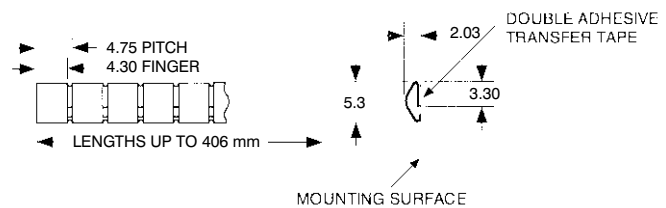

ECP 0650


(ECP 0651 with 4.75mm pitch)

NO-SNAG FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.089 Thk.	45 kg/m	to 113 kg/m

Material: beryllium copper – .09 mm thick

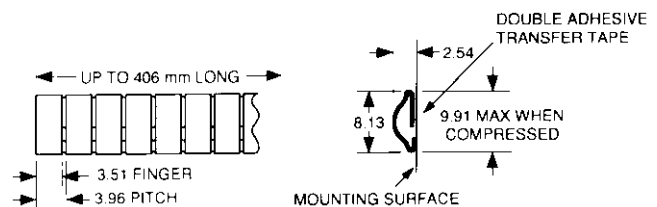

ECP 0654


(ECP 0653 with 3.2mm pitch)

NO-SNAG FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.089 Thk.	45 kg/m	to 89 kg/m

Material: beryllium copper – .09 mm thick

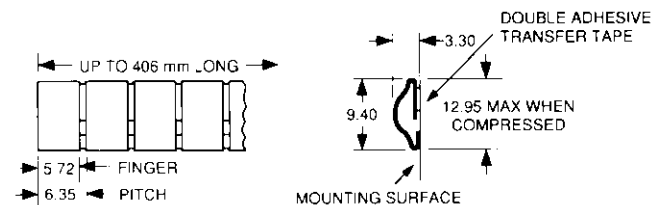

ECP 0657


(ECP 0656 with 4.75mm pitch)

NO-SNAG FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.089 Thk.	19 kg/m	to 48 kg/m

Material: beryllium copper – .09 mm thick

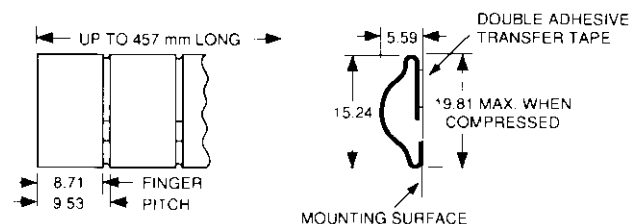

Pressure Sensitive Mounting


ECP 0658

NO-SNAG FINGERS

Performance Range

	25% Compression-50% Compression	
Standard 0.089 Thk.	19 kg/m	to 48 kg/m

Material: beryllium copper – .09 mm thick

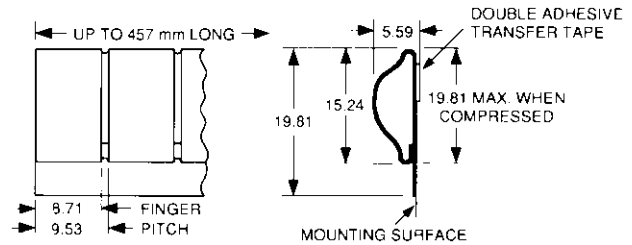


ECP 0699

PANEL GASKETS

Performance Range

	25% Compression-50% Compression	
Standard 0.13 Thk.	22 kg/m	to 103 kg/m

Material: beryllium copper – .13 mm thick

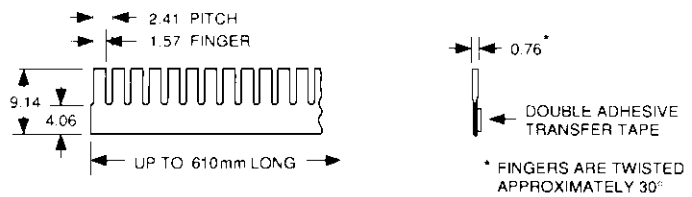


ECP 0625

PANEL GASKETS

Performance Range

	25% Compression-50% Compression	
Standard 0.08 Thk.	18 kg/m	to 71 kg/m
"LC" Style 0.05 Thk.	4 kg/m	to 15 kg/m

Material: beryllium copper – .08 mm thick (LC style– .05 mm thick)

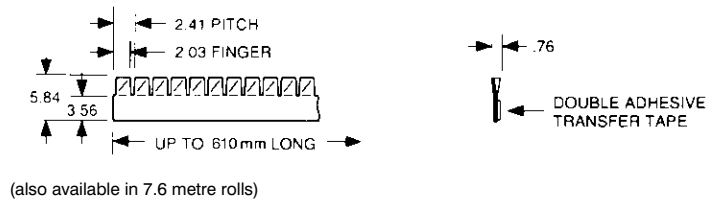


ECP 0625/90°

PANEL GASKETS

Performance Range

	25% Compression-50% Compression	
Standard 0.08 Thk.	18 kg/m	to 76 kg/m

Material: beryllium copper – .08 mm thick

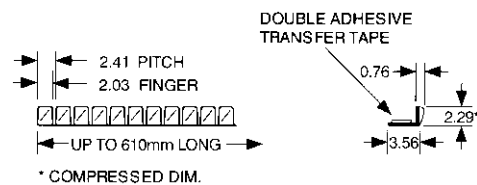


ECP 0697

PANEL GASKETS

Performance Range

	25% Compression-50% Compression	
Standard 0.08 Thk.	13 kg/m	to 33 kg/m
"LC" Style 0.05 Thk.	3 kg/m	to 10 kg/m

Material: beryllium copper – .08 mm thick (LC style– .05 mm thick)

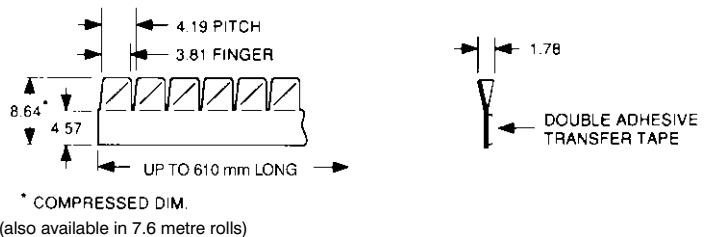


ECP 0697/90°

PANEL GASKETS


Performance Range

	25% Compression-50% Compression	
Standard 0.08 Thk.	13 kg/m	to 33 kg/m

Material: beryllium copper – .08 mm thick

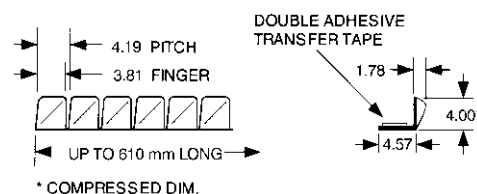

Pressure Sensitive Mounting

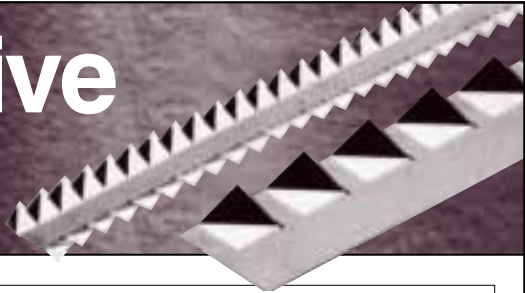



ECP 0698

PANEL GASKETS

Performance Range

	25% Compression	50% Compression
Standard 0.08 Thk.	28 kg/m	57 kg/m

Material: beryllium copper – .08 mm thick



* COMPRESSED DIM
(also available in 7.6 metre rolls)



ECP 0627

PANEL GASKETS

Performance Range

	25% Compression	50% Compression
Standard 0.08 Thk.	7 kg/m	16 kg/m

Material: beryllium copper – .08 mm thick



* COMPRESSED DIM.
(also available in 7.6 metre rolls)



ECP 0623

PANEL GASKETS

Performance Range

	25% Compression	50% Compression
Standard 0.10 Thk.	21 kg/m	31 kg/m

Material: beryllium copper – .10 mm thick



* COMPRESSED DIM.